



Model HD-7W Four-Post Lift
WIDE / HIGH LIFT / SHORT RUNWAYS

The space saving HD-7W four-post lift provides high lifting with short runways and extended drive-thru clearance to accommodate wider vehicles. The HD-7W maximizes valuable floor area and turns your garage space into the perfect storage and service area for cars and trucks, ATVs, snowmobiles, jet skis, golf carts, boats or just about anything else that needs to be off the ground. If you've got at least a standard 8-foot ceiling you'll be able to make use of that wasted vertical space above your car. An optional caster kit allows you to roll the lift outside or wherever best suits your needs.



Optional Drip Trays



Optional RJ-45 Bridge Jack




Optional Caster Kit

Features:

- 7,000 pound lifting capacity
- Wide drive-thru with tall lifting height and short runways
- Electric/hydraulic power system
- Internal "Anti-Sway" slider blocks in each column
- Features heavy-duty 3/8" aircraft cable
- Multi-position safety locks in each column
- Ramps feature non-skid surface
- Runways include rail-kit for optional accessories
- Single hydraulic cylinder underneath runway
- Oversized self-lubricating cable rollers
- Rugged 1-1/4" roller axles
- Adjustable lock ladders
- Push-button pneumatic safety release
- Optional 4500-lb. capacity jack available (Model RJ-45)



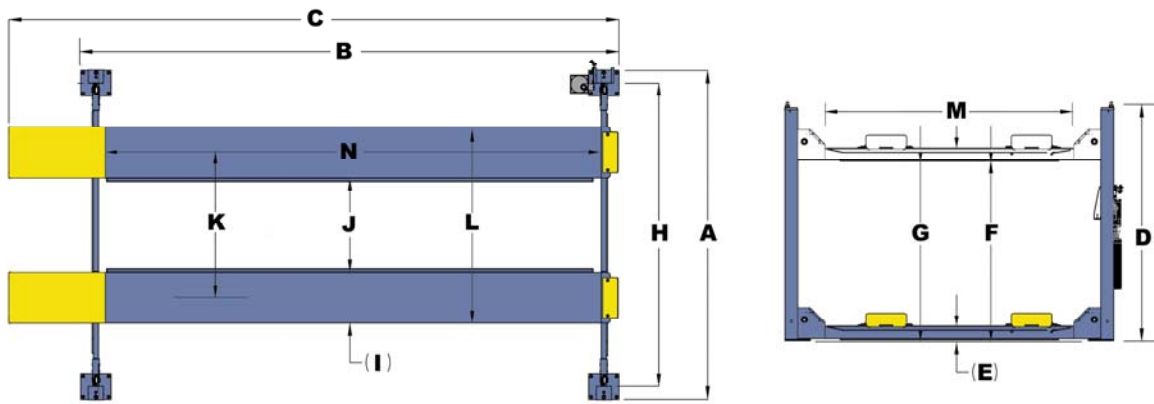

MODEL	HD-7W
Style	Short Runway / Wide / High Lift
Lifting Capacity*	7,000 Lbs. / 3175 Kg.
*Max Capacity / Front Axle	3,500 Lbs. / 1588 Kg.
*Max Capacity / Rear Axle	3,500 Lbs. / 1588 Kg.
A - Overall Width	116-3/4" / 2965 mm.
B - Outside Length	174" / 4420 mm.
C - Overall Length	200" / 5080 mm.
D - Height of Columns	100" / 2540 mm.
E - Min. Runway Height	4-1/2" / 114 mm.
F - Max. Rise	82" / 2083 mm.
G - Max. Lifting Height	86-1/2" / 2197 mm.
H - Width Between Posts	106-3/4" / 2711 mm.
I - Runway Width	19" / 483 mm.
J - Width Between Runways (*) NARROW	37-1/2" / 952 mm.
J - Width Between Runways (*) WIDE	44-3/8" / 1127 mm.
K - Runway Centerline (*) NARROW	56-1/2" / 1435 mm.
K - Runway Centerline (*) WIDE	63-3/8" / 1610 mm.
L - Outside Edge of Runways (*) NARROW	75-1/2" / 1918 mm.
L - Outside Edge of Runways (*) WIDE	82-3/8" / 2092 mm.
M - Drive-Thru-Clearance	93-1/2" / 2375 mm.
N - Length of Runways	164" / 4166 mm.
Locking Positions	15
Lock Spacing	Every 4" / 102 mm.
Lifting Time	35 Seconds
Min. Wheelbase @ Rated Capacity	115" / 2921 mm.
Min. Wheelbase @ 75% Capacity	100" / 2540 mm.
Min. Wheelbase @ 50% Capacity	85" / 2159 mm.
Min. Wheelbase @ 25% Capacity	70" / 1778 mm.
Locking Positions	15
Lock Spacing	Every 4" / 102 mm.
Lifting Time	35 Seconds
Standard Motor (*)	220 VAC / 60 Hz. 1Ph.

* This dimension may be limited with the addition of rolling jacks. See rolling jack specifications on separate page.

** Special Voltages Available Upon Request

The design, material and specifications are subject to change without notice.