






# THE GEOLINER® 920 HEAVY-DUTY WHEEL ALIGNER. FAST, ACCURATE, AND COMPREHENSIVE.

# SIMPLE AND COMPLETE

3 AXLE VEHICLE 4 MIN


4 AXLE VEHICLE 5 MIN

TRUCK & TRAILER 9 MIN

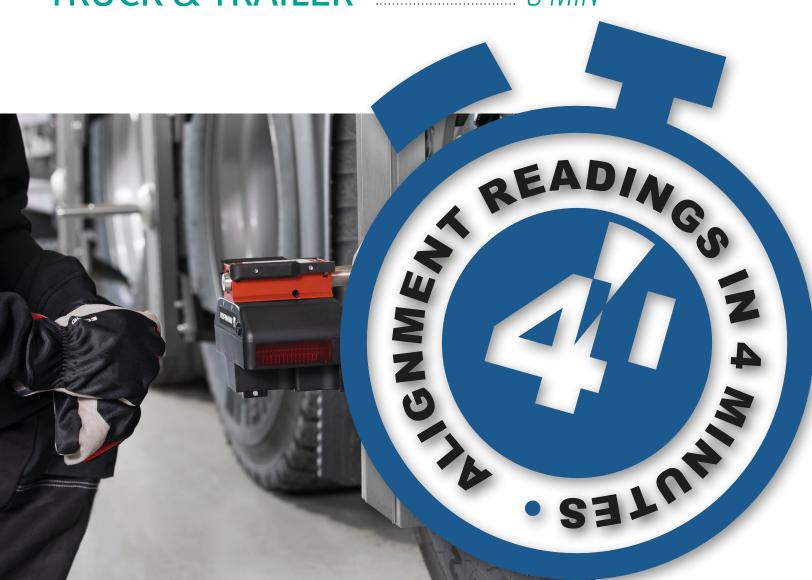

# MAXIMIZE ECONOMY WITH MINIMAL EFFORT USING COMPREHENSIVE TOOLS.

With the geoliner® 920, checking wheel alignment on heavy-duty vehicles is faster and easier than ever before. Support for a wide range of vehicles, the geoliner 920 wheel alignment system can perform alignments on everything from medium duty trucks to mobile cranes.



- In under four minutes, a single operator can measure a vehicle. Cut that time in half by simultaneously measuring the left and right side of the vehicle with a second operator.
- Increase your revenue or support fleet maintenance with fast drive-thru alignment checks.
- The area used to perform wheel alignments remains fully available for other tasks when there is no alignment in process.

#### Performing wheel alignments on heavy-duty vehicles has never been so easy:

- Mount the targets to the floor or the wall for a faster, easier set up time. The only devices left to be mounted on the vehicle are the wheel clamps and the corresponding measuring heads.
- Light-weight, all aluminum wheel clamps are easily mounted to a wide range of wheels, supporting inside and outside clamping.
- Easy repair with real-time adjustments and user-friendly interface.

### THE 920 CAN MEASURE ALL TYPES OF VEHICLES

- ✓ Medium & Heavy-Duty Trucks
- **✓** Busses
- ✓ Articulated busses
- **✓** Trailers
- **✓** Semi-trailers
- **✓** Transporter vehicles
- Complete carriages (truck + semi-trailer)



MEASURING OF ARTICULATED BUS



MEASURING OF SMALLER TRANSPORTER VEHICLE



WIDE RANGE OF VEHICLES SUPPORTED







FRONT AND REAR TARGETS



WHEEL ALIGNMENT MEASURING HEAD

## FLOOR MOUNTED OR MOBILE TARGET SCALES - YOU DECIDE!



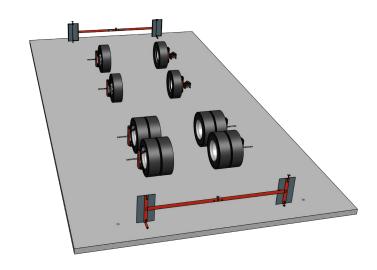

#### FOR SHOPS WITH HIGH-VOLUME

Clean configuration with removable floor mounted targets for fast setup, tear down, and drive-thru capability.



### FOR SHOPS WITH LOW-VOLUME, MULTI-BAY OR MOBILE OPERATIONS

Mobile target scales can be moved to different locations and avoid drilling holes for permanent mount. Setup is fast and easy thanks to software guidance.

Target scales can be mounted on a dedicated floor area with a surface up to 72' in length, and about 13' in width.

In both alternatives the target scales can be removed so that the workshop floor can be used for other purposes.

TECHNICAL SPECIFICATIONS	
Wheel size	16" - 24" (406 - 610mm)
Number of axles supported	10 (3 with included equipment)
Shipping weight	730 lbs.
Power requirements	120-240V 1Ph 50/60Hz 15A

For more information about the geoliner® 920, call 800.251.4500 (US) or 800.267.2185 (Canada) www.hofmann-equipment.com

