

Flexibility

The lift is flexible in width and height which can be adjusted to maximize your shop's layout, utilization & efficiency.

Lifting Arms

Designed to engage short and long wheelbase vehicles.

Operating Performance

Powerful lifting - industry only oil immersed motor. The powerful motor runs in the hydraulic fluid keeping it clean, cool and permanently lubricated for up to **5x** the lift of a standard bolt on power unit.

Time is Money

The HF NT has the fastest lifting and lowering times in the industry 20 seconds up / 16 seconds down with **No Battery Required.**

Exclusive NT

Hydraulic System
Two independent hydraulic systems with HyperFlow® allowing redundant synchronization to keep lift level.

No Equalization Cables

Patented HyperFlow® technology allows the lift to equalize itself each time it reaches its top position. This innovation means your lift is safer as a broken cable can drop a car. It also means you can save up to \$2,000 over the life of the lift on inspection fees and cable replacements.

Narrow Bay Installation

More space, more lifts

Cylinders

Protective coverings for cylinders provide safety and clean appearance.

HF 8000 NT shown.




HyperFlow® Advantages

- 4 cylinders in the lift with no mechanical locks thanks to the redundant hydraulic system
- The synchronization is automatically performed in the top position
- Manual equalization valves to ensure synchronization are no longer required
- Automatic equalization of the hydraulic system when approaching maximum raised position
- **Reduced of wear parts, no mechanical locks, no cables or pulleys**

The HF NT series is a revolutionary hydraulic two post lift. The patented HyperFlow® technology allows the lift to be perfectly and automatically synchronized without cables or pulleys. A double hydraulic circuit with 4 cylinders makes a mechanical locking system no longer necessary. This new generation of lifts are the perfect solution to increase the productivity and efficiency of the workshop while reducing cost of ownership.



HF 12000 NT DG with symmetric double jointed carrying arms perfect for vans, SUV and passenger cars

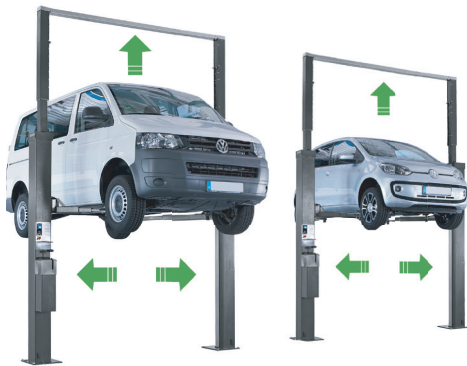

Both HF NT models are flexible in width and height and can be adjusted to the workshop conditions and activity.

Lift can be seen on Velocity Channel's Wheeler Dealers



HF 8000 NT / HF 12000 NT FEATURES:

- **No Equalization Cables:** Patented HyperFlow® technology allows the lift to equalize itself each time it reaches its top position. This innovation means your lift is safer as a broken cable can drop a car. **It also means you can save up to \$2,000 over the life of the lift on inspection fees and cable replacements.**
- **Time is Money:** The HF NT has the fastest lifting and lowering times in the industry. 20 seconds up / 16 seconds down with **No Battery Required.**
- 2 variations available with 8,000 lb capacity and asymmetric arms and 12,000 lb and unique double-jointed arms.
- Fast lifting and lowering times guarantee high cost effectiveness
- Powerful and uniform lifting with control lever
- No floor connection and no top static connection of the columns is necessary
- NT System - double hydraulic system replaces mechanical locks
- Hyperflow Technology ensures synchronization without cables or pulleys
- Nearly wear-free hydraulic cylinders
- Self-equalization system for the hydraulic system
- Slim design – cylinders are protected behind covers
- Far reach arms to pick up long vans with lowest lifting point
- Low noise oil-submerged motor

Technical Data*	HF NT 8000	HF NT 12000 DG
Lifting Capacity (lbs)	8,000	12,000
Lifting Time Approx. (sec) up / down	26 / 15	31 / 15
Lifting Height (in)	80.75"	80.75"
Lowest Lifting Point (in) min / max	4.5" - 7.5"	4.75" - 7.75"
Total Height Column (in)	158.5"	156"
Total Height w/ Riser Pipe (in) min / max	161.8" - 193.25"	161.8" - 191.5"
Drive-Through Width (in)	99.25"	109.75"
Total Width (in)	132"	147.5"
Long Arms Extraction (in) min / max	44.5" - 72.5"	0" - 71.85"
Short Arms Extraction (in) min / max	22.5" - 45.75"	-
Power Supply (V/Hz/ph)	208 / 230 / 1ph 20 AMP	208 / 230 / 1ph 20 AMP
Motor (hp)	3	3

* All technical data are subject to change.