



F7925 OLP

SERIES 7000

Premium Duty Spring Retractable Reels



7650 OLP

Most versatile series that is robust and ideal for the most demanding applications, including pressure wash and garden center reels

Quality finish and corrosion resistant—Individually powder coated components offer maximum protection from premature corrosion

Full flow stress-free swivel design—Combines the highest grade seal design and materials for maximum service life. The hose is plumbed into the base to eliminate the risk of undue stress on the swivel

Reinforced steel—The steel guide arm and base are stamped with ribs and gussets to ensure maximum strength and lightest possible weight

Guide arm adjusts to seven positions

Available with controlled return, enclosed, or in stainless steel



AIR



WATER



OIL



GREASE

I.D. Hose Sizes

1/4", 3/8", 1/2", 3/4"

Reel Accessories

Part	Part Number	Specifications
Pivot Base	S600608	340°, Color: Black
Swing Bracket	600626	Wall Mount, Color: Black
Protective Cover	S263227	Polyester with PVC Coating
Inlet Hose	Visit reelcraft.com for more information	




Model with Hose and Bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in
Low Pressure Air/Water Reels Maximum Temperature 150°F (65°C) Maximum Working Pressure is at 70°F (20°C)													
7650 OLP	43	20	3/8	10	.600	15	50	15	300	21	1/4	1/2	1/2
7670 OLP*	47	21	3/8	10	.600	15	70	22	300	21	1/4	1/2	1/2
7850 OLP*	47	21	1/2	13	.750	19	50	15	300	21	3/8	1/2	1/2
7850 CLP**	57	26	1/2	13	.750	19	50	15	300	21	3/8	1/2	1/2
7850 OLP121	47	21	1/2	13	.750	19	50	15	300	21	1/2	1/2	1/2
7925 OLP	47	21	3/4	19	1.075	27	25	8	250	17	3/4	3/4	3/4
Medium Pressure Oil Reels Maximum Temperature 210°F (99°C)													
7650 OMP	55	25	3/8	10	.690	18	50	15	2600	179	3/8	1/2	1/2
7850 OMP*	57	26	1/2	13	.820	21	50	15	3000	207	1/2	1/2	1/2
High Pressure Grease Reels Maximum Temperature 210°F (99°C)													
7450 OHP	55	25	1/4	6	.580	15	50	15	5000	345	1/4	1/2	3/8
7650 OHP	60	27	3/8	10	.730	19	50	15	4800	331	1/4	1/2	3/8

***Most popular models** **Cabinet style reel - guide arm not included; inlet hose is included | Low pressure reels supplied with PVC hose. Medium pressure reels supplied with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels supplied with S.A.E. 100 R2T two wire braid hose.

Model without Hose and Bumper	Shipping Weight		Hose Capacity					Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet	
	lbs	kg	Hose I.D.		Hose O.D.		Hose Length		psi	bar	in	in
			in	mm	in	mm	ft	m				
Low Pressure Air/Water Reels Maximum Temperature 210°F (99°C)												
7600 OLP	40	18	3/8	10	.600	15	70	22	500	35	1/2	1/2
7800 OLP	41	19	1/2	13	.750	19	50	15	500	35	1/2	1/2
7900 OLP	44	20	3/4	19	1.075	27	25	8	500	35	3/4	3/4
Medium Pressure Oil Reels Maximum Temperature 210°F (99°C)												
7600 OMP	43	20	3/8	10	.690	18	50	15	3000	207	1/2	1/2
7800 OMP	43	20	1/2	13	.820	21	50	15	3000	207	1/2	1/2
High Pressure Grease Reels Maximum Temperature 210°F (99°C)												
7400 OHP	43	20	1/4	6	.580	15	50	15	5000	345	1/2	3/8
7600 OHP	46	21	3/8	10	.730	19	50	15	5000	345	1/2	3/8

Dimensions - Size Index

	A	B	C	D	E
in	20 1/4	19 3/4	7 13/16	3 7/8	7
mm	514	502	198	89	178

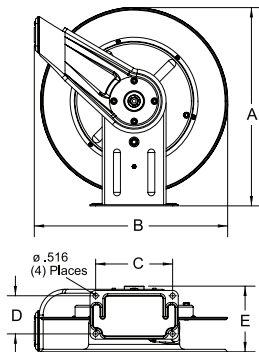

Additional Models Available for:



FUEL



TWIN HYDRAULIC



WELDING



Interactive Reel Catalog

