



TIRE SERVICE INTERNATIONAL

6030 QUICK MOUNT WHEEL LOCK

buyTSI.com - 800.223.4540



Read this manual before operating

Tire Service International, LLC

3451 S. 40TH ST.
Phoenix, AZ 85040

Office: 602.437.5020
Email: sales@buytsi.com
Fax: 602.437.5025

Contact us for any assistance

800.223.4540

Revised: April 2022

Operating Instructions

STEP 1 - Locate the base on a clean, solid and level work surface. Make sure there is ample space around to perform the work.



STEP 2 - The cones should be stored on the base so they are available when needed.



STEP 3 - Remove the cone to be used based on the wheel size. Place the supporting shaft and hub assembly in the base tube.



STEP 4 - Place the appropriate cone on the supporting shaft and hub as shown with the smaller end facing up.




STEP 5 - Place the tire and wheel assembly on the hub assembly, insuring the wheel is level




STEP 6 - Place the retaining unit over the shaft while holding out the two knobs. Turn approximately 1/4 turn to lock.



STEP 7 - Locked position when holding the wheel.

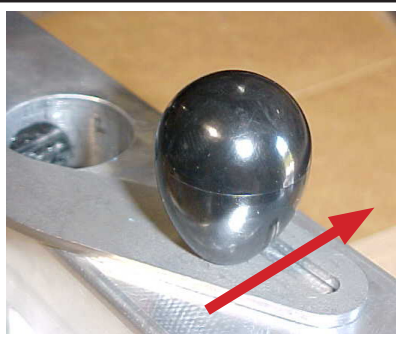

STEP 8 - Unlocked position to remove the retaining unit.

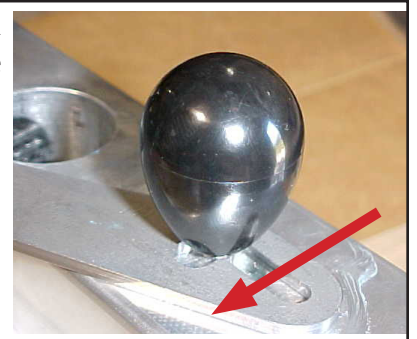

Repair Parts List

Item	Description
10976	Cone - small
10975	Cone - medium 3.75"
10974	Cone - medium large
10977	Cone - large
10987L *	Shaft, Plunger Left
10987R *	Shaft, Plunger Right
11546	Ball Detent with body
11545	Protector Ring (single)
924 *	Knob, Plastic
11506	Retaining Ring - Internal
10955	Shaft, Mandrell
10973	Cup, Handle Retaining
11505 *	Retaining Ring - Internal
10716 *	Spring .75"
10979	Spring 3.5"
10983 *	Stud
6034-K	Quick Mount Lock Handle Kit * Includes two each of items marked

Warranty and Return Policy

Warranty & Workmanship you can depend on.

With over 30 years of manufacturing experience we maintain the ability to provide competitive prices while employing and manufacturing the majority of our products in the USA. Pride in our workmanship and standing behind each and every product is not just our claim but our uncompromising responsibility.

Tire Service International equipment is warranted to be free from defects in materials and workmanship for a period of one year from the date of original purchase to the original owner. Repair labor is warranted for 90 days from the date of original purchase. Bushings, blades, bearings and normal wear and tear are not covered under warranty. Careless handling, negligence, misuse, abuse, mutilation, improper operation, making unauthorized repairs, additions, and or alterations automatically cancel this warranty and relieves TSI of any obligation. Cheetah tanks claimed to be defective while under warranty will be evaluated at our manufacturing plant and either repaired if possible or exchanged and returned or credit issued to the customer account at our discretion. Damage resulting from dropping the tanks will not receive warranty consideration. Warranty parts need to be returned prepaid to the plant for credit. Any replacement parts shipped from the plant will be shipped at the customer's expense. Machines requiring warranty work must be brought to the manufacturing plant in 201 Chelsea Rd, Monticello, MN or to a repair facility authorized by TSI.

!!WARNING!! Goods returned without an RGA will be refused. A Returned Goods Authorization form must be obtained before returning any material or goods. All non-warranty returns will be subject to a 15% restocking fee plus any additional charges for reconditioning/repacking.



Visit www.buyTSI.com for any additional information. Also be sure to follow us on all the Socials, and subscribe to our YouTube channel for all our product videos.

Copyright © 2022 Tire Service International, LLC

No part of this manual may be reproduced without specific approval from Tire Service International, LLC.