



# TI-96 TIRE INSPECTOR

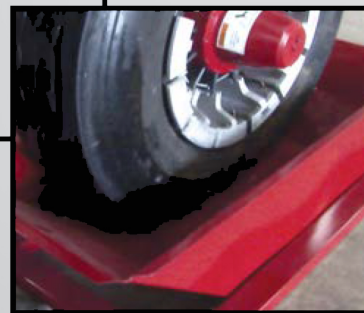

The TI-96 Tire Inspector includes the standard 22" to 24.5" expandable rim assembly. Other expandable rims are available to accommodate passenger and light truck tires.

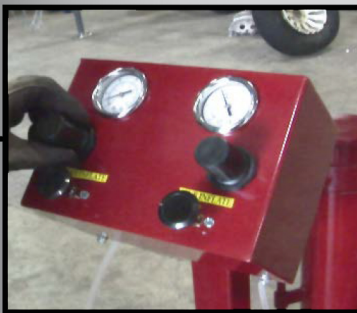

## SHIPPING SPECIFICATIONS:

55" L x 77" W x 52" H  
656 lbs shipping weight

## PRODUCT FEATURES

The TI-96 Tire Inspector is designed to inspect non mounted tires from 13" to 24.5" in rim diameter using an expandable hub and rim assembly.

- The TI-96 Tire Inspector allows the operator to inspect tires for sidewall and tread leakage using a dunk test tank.
- Foot operated power lift will save time and injury by lifting those heavy tires from floor into the test tank.
- The TI-96 tire and hub assembly rotates easily for inspection and all operating controls are located on the side of the machine for easy operation.
- A standard 1/4", 90 PSI air line operates the unit and no electricity is required.

## OPT EXPANDING RIMS



09.410 (14" - 17" x 7 1/8")  
10.410 (17" - 20" x 8 1/4")  
11.410 (20" - 22.5" x 9")  
12.410 (22" - 24.5" x 9")  
13.410 (20" - 22.5" x 11 3/4")  
14.710 (14" - 17" x 10")  
172010 (17" - 20" x 10")

Rev. 04.23.2019



Made in the USA at our plant in Monticello, MN  
3451 South 40th Street, Phoenix, Arizona | [www.buytsi.com](http://www.buytsi.com)  
Ph: 800.223.4540 | Fax: 602.437.5025 | Email: [sales@buytsi.com](mailto:sales@buytsi.com)