



# AIR-OPERATED DIAPHRAGM PUMP EVACUATION SYSTEM KIT

Available in both in both UL and non-UL Listed options, this versatile Air-Operated Diaphragm Pump Evacuation System Kit comes in a leak-free, all-bolted durable construction for use in automotive applications, among others. Rated for use with diesel, kerosene and oil, this pump features O-ring seals and Nitrile diaphragm material, making it ideal for low-viscosity petroleum fluids.

HANDLING OILS & FLUIDS

JDI-DPES

**Air-Operated Double Diaphragm Pump**

- 1" Inlet/Outlet
- Heavy-duty aluminum construction
- 1/4" Air Inlet
- 24 Gallons Per Minute (GPM)\*

**Air Hose**


- 2' air hose with 115 MAX psi

**Filter Regulator**

- High-efficiency filter controls pressure and flow of discharge

**Wall Mount Bracket**

- Easily attach to wall or other preferred mount

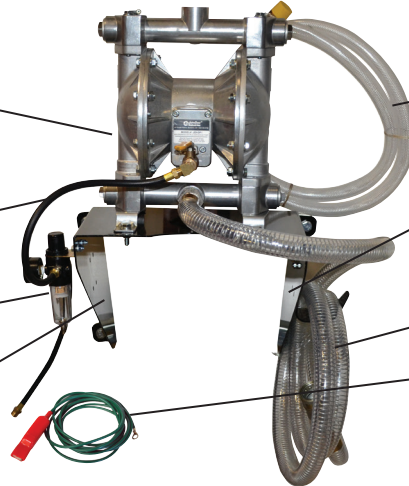

**6' Delivery Hose**

- 1" Inlet/Outlet

**Hose Bracket**

- Attaches to wall mount
- Prevents clutter and potential hose damage

**10' Suction Hose**

- 1" Inlet/Outlet

**Ground Wire**

- Prevents static discharge

JDI-DPES-UL

**Air-Operated Double Diaphragm Pump**

- 1" Inlet/Outlet
- Heavy-duty aluminum construction
- 1/4" Air Inlet
- 24 Gallons Per Minute (GPM)

**Air Hose**


- 2' air hose with 110 MAX psi

**Filter Regulator**

- High-efficiency filter controls pressure and flow of discharge

**Wall Mount Bracket**

- Easily attach to wall or other preferred mount

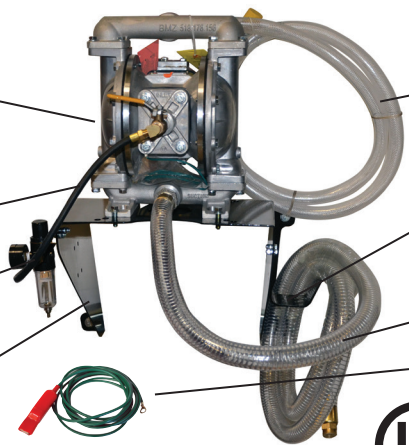

**6' Delivery Hose**

- 1" Inlet/Outlet

**Hose Bracket**

- Attaches to wall mount
- Prevents clutter and potential hose damage

**10' Suction Hose**

- 1" Inlet/Outlet

**Ground Wire**

- Prevents static discharge



SPECIFICATIONS:	JDI-DPES	JDI-DPES-UL
FLOW RATE	24 GPM	24 GPM
BALL VALVE	PTFE	PTFE
SUCTION HOSE	10'	10'
DELIVERY HOSE	6'	6'
MATERIAL	NITRILE	NITRILE
WEIGHT (PUMP ONLY)	22 LBS.	22 LBS.
MAX PSI	115	110

\*Flow rate will vary based on temperature, viscosity, purity, and type of fluid.


# AIR-OPERATED DIAPHRAGM PUMP

When you simply need an air-operated diaphragm pump, the JDI-DP1 and JDI-DP1-UL both come in an all-bolted durable construction for use in automotive applications among others. Rated for use with diesel, kerosene and oil, these UL and non-UL Listed pumps feature O-ring seals and Nitrile diaphragm material, making it ideal for low-viscosity petroleum fluids.


## Features include:

- 1" Inlet/Outlet
- Heavy-duty aluminum construction
- 1/4" Air Inlet
- 24 Gallons Per Minute (GPM)\*
- 22 lbs.
- JDI-DP1 Max psi: 115 psi
- JDI-DP1-UL Max psi: 110 psi

JDI-DP1

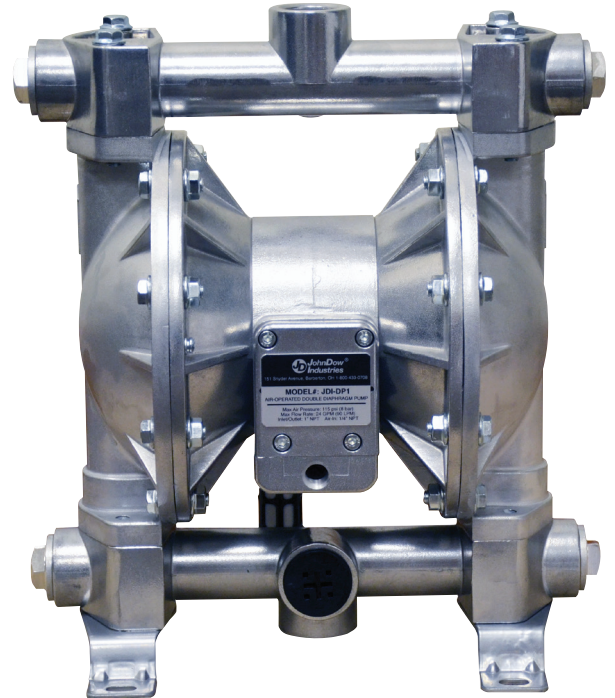

JDI-DP1-UL

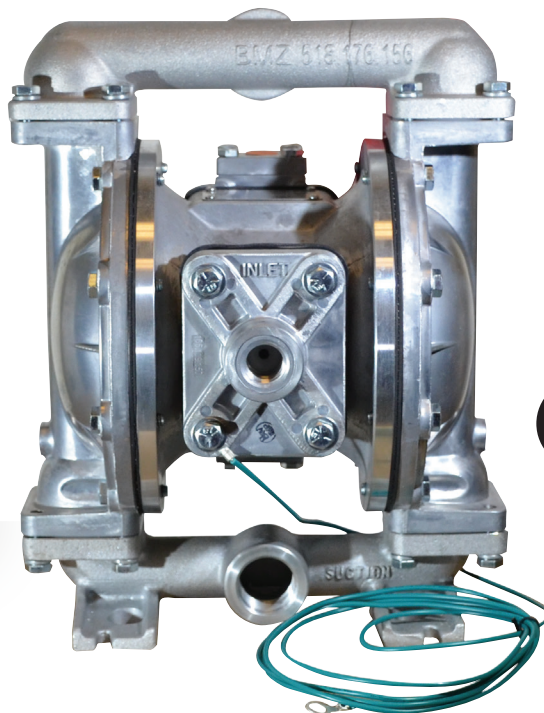

\*Flow rate will vary based on temperature, viscosity, purity, and type of fluid.

151 SNYDER AVE. | BARBERTON, OH 44203 | TOLL-FREE: 800.4330708 | FAX: 330.753.6419